

Repositório ISCTE-IUL

Deposited in *Repositório ISCTE-IUL*:

2022-06-03

Deposited version:

Accepted Version

Peer-review status of attached file:

Peer-reviewed

Citation for published item:

Sharma, R., Moreira, F., Saragoça, G. & Ferreira, J. (2020). Effective non-invasive runway monitoring system development using dual sensor devices. In *Intelligent Transport Systems, From Research and Development to the Market Uptake. Lecture Notes of the Institute for Computer Sciences, Social Informatics and Telecommunications Engineering*. (pp. 110-121).: Springer.

Further information on publisher's website:

[10.1007/978-3-030-71454-3_7](https://doi.org/10.1007/978-3-030-71454-3_7)

Publisher's copyright statement:

This is the peer reviewed version of the following article: Sharma, R., Moreira, F., Saragoça, G. & Ferreira, J. (2020). Effective non-invasive runway monitoring system development using dual sensor devices. In *Intelligent Transport Systems, From Research and Development to the Market Uptake. Lecture Notes of the Institute for Computer Sciences, Social Informatics and Telecommunications Engineering*. (pp. 110-121).: Springer., which has been published in final form at https://dx.doi.org/10.1007/978-3-030-71454-3_7. This article may be used for non-commercial purposes in accordance with the Publisher's Terms and Conditions for self-archiving.

Use policy

Creative Commons CC BY 4.0

The full-text may be used and/or reproduced, and given to third parties in any format or medium, without prior permission or charge, for personal research or study, educational, or not-for-profit purposes provided that:

- a full bibliographic reference is made to the original source
- a link is made to the metadata record in the Repository
- the full-text is not changed in any way

The full-text must not be sold in any format or medium without the formal permission of the copyright holders.

Effective Non-invasive Runway Monitoring System Development using Dual Sensor Devices

No Author Given

No Institute Given

Abstract. At airports the runways are always troubled by the presence of ice, water, cracks, foreign objects, etc. To avoid such problems the runway is supposed to be monitored regularly. To monitor a large number of technique are available such a runway inspection mobile vans. These techniques are largely human dependent and need interruptions in the runway's operations for inspection. In this position paper, we suggest an alternative way to monitor the runway. This method is non-invasive in nature with the involvement of Light Detection and Ranging (LIDAR) sensors. In the methodology, we describe the schemes of labelling the data obtained from LIDAR using a MARWIS sensors fitted in a mobile van. We describe the entire system and the underlying technology involved to develop the system. The proposed system has the potential of developing an efficient runway monitoring system because the LIDAR technology has proved its efficiency in several terrestrial mapping and monitoring system.

Keywords: Runway Monitoring · LIDAR · Machine Learning.

1 Introduction

Runways, taxiways, and aprons are some essential entities on all airports, and they need to be maintained well for the safety of the carriers and the passengers. On all airports, the foreign objects (FO), ice or water films, and structural defects (e.g. cracks) are important factors that impose a potential threat to the carriers. Due to these types of threats the runways, taxiways, and the aprons are to be monitored regularly. Generally, the FOs are observed on taxiways, and runways [24] they can lead to accidents like that of Air France Flight 4590 on 25th July 2000, where due the FO debris the airplane crashed into a hotel killing 113 persons [3]. Amongst the FOs found at Airports 60% and metallic and 18% are of rubber materials, respectively [9]. Besides this, the aviation industry has lost around 4 billion dollars just because of the problem of foreign objects [6]. Some radar-based systems can be used to detect foreign objects on the runways using millimeter-wave imaging [23, 5, 13]. These methods are non-invasive but interfere with current installations of the airport and therefore require special permission. Besides interference, the system is expensive and requires special training for installations and maintenance and may not be suitable for mid-sized or small airports. Another non-invasive foreign object detection system uses the

technology from the visual domain where the videos and images were taken at different time intervals for FO detection [17, 2]. Another method used Convolutional Neural Networks to build an automated system for region-based object detection using data obtained from the cameras mounted on runway scanning vehicle [1].

Structural integrity is the other issue at the airports that also lead to problems including accidents because any flaw on the taxiway or runway impacts the aircraft's taxing, landing (or take-off) [14]. An interesting work used robot mounted Ground Penetrating Radar and camera to detect cracks on the runway [7]. For non-invasive structural flaw detection on runways, a large number of methods have been developed that identify cracks on the track using computer vision [19, 15]. Ice and thin field of water are other problems that lead to the critical situation at airports especially during landing and take-off of the aircraft. Several sensor-based techniques exist that can be used to detect ice formation on the runways using microwaves [4] and capacitance [21] measurement of the surface.

The existing runway monitoring for the aforementioned problems is mostly invasive therefore require a lot of time to scan the tracks eventually interrupts the operations at the airport. Ice formation, waterlogging and structural deformations are persistent problems and one scan a day is sufficient. However, the foreign objects require regular monitoring of the runway and invasive methods cannot be used for this purpose. In this paper, we are suggesting a system that can monitor the entire runway in a non-invasive manner. The proposed system exploits the LIDAR technology to perform the real-time scanning of the runway. We describe several technologies that will be used to develop the proposed system. While describing these technologies we also justify; how the system can detect all the tree types of anomalies found at the airports; how monitoring is possible in real-time; and how anomalies can be geo-referenced to determine their locations. The article is organized as follows. Section 2 describes some existing systems that are used to monitor the runways. Section 3 details the technologies necessary to build the proposed system. In Section 4 we describe the entire system for non-invasive runway monitoring along with the development information. We end this article in Section 5 with conclusions and direction to system development.

2 Related Runway Monitoring Systems

In this section, we provide information about some existing systems that are suitable for structural deformations on the runway, or identification of foreign objects, or water thickness on the tracks.

2.1 Monitoring Systems for Structural deformations

The structural deformations are found everywhere at the airports, but they become a security risk when encountered by airplanes, especially on runways.

-1 **RIS Hi-PAV:**

This is a road and runway assessment system that uses ground penetrating radar (GPR) to perform the survey of several road conditions (such as detecting cavities, and cracks) [8]. RIS Hi-PAV can scan the entire runways at a high speed (e.g. 260 Km/hr) using a single antenna. This system can be used to verify and test new roads. This system comes with a semi-automatic road sub-surface detection software (GRED 3D) that makes it easy to use and take little survey and processing time. This system is non-invasive but needs to use a mobile van to scan the entire runway and therefore interrupt the operations at the airports.

-2 **Roadscanners**

The Roadscanner is a non-invasive system that comes with an entire package of runway monitoring, mapping, diagnostic, and inspection [18]. The Roadscanner runway system has three components: first, the Road Doctor Survey Van mounted with technologies (e.g. GPR and LIDAR) to scan the path on airport wherever the van goes; second, the Road Doctor Software that processes the data obtained from the Van; third, the team of expert consultants that interprets the processed data. This system is suitable for surface monitoring, sub-surface monitoring, quality control, maintenance optimization, and underground mapping. Though the system is very advanced does not perform the real-time monitoring of the entire runway and needs human supervision to carry out anomaly detection such as structural deformations.

2.2 Monitoring System for Foreign Objects

As described in the introduction, the FOs are very critical, especially, when they are found on runways of airports. In this section, we describe that are well-reputed in detecting FO debris on runways.

-1 **iFerretTM**

iFerretTM is an intelligent vision-based runway FO detection system capable of: real-time, automated FO detection, identification and pin-point FO's location; recording, and post-event analysis; full visual assessment from ATC/Ground Ops Control [10]. With the software and Electro-Optic Sensors, iFerret automatically detects, locates, classifies, and records FO at commercial airports and military airbases. The system uses color (i.e. green, yellow, and red) coding to classify the type of FO and its associated threat (i.e. no, medium, and high threat respectively). The system is very good but it's difficult to train the system to identify the same object as FO at a different light intensity. The system also has problems identifying small FOs having the same color as the floor.

-2 **Tarsier**

The Tarsier system is an automatic runway FOD detection system, which uses millimeter-wave (MMW) radars to continuously scan runway surfaces [20]. The radar performance is not affected by dust or heatwaves and pinpoints debris location in a precise range and bearing. Being a non-invasive, this

system provides FO detection also in low light conditions like shadow, darkness, rain, and fog. The system is capable of detecting FOs such as metal, plastic, rubber, glass, and organic matter. Status information is relayed to airport operators through a graphical display. Live video feeds from a powerful MIL-SPEC day and night camera systems are automatically cued to allow object verification before personnel is dispatched to remove debris. A high-resolution night camera combined with a near infra-red illumination tuned to the lens system far exceeds any competing night vision system. An event log records data for historical analysis. This system is also good but it's difficult to exactly locate the debris on the track and this situation becomes worse when FO is dangerous and small, and the light is low.

3 Background

3.1 LIDAR Technology for Terrestrial Scanning

The Light Detection and Ranging (LIDAR) is a methodology where a distance (range) of an object is calculated by projecting a laser beam on the object and sensing its reflection on a sensor. The variation in the time of reflected beam and changes in its wavelengths are used to build a 3-D image of the target object. Mostly, the range is determined using two techniques; first, using the phase of the beam; second, using the pulse of the beam. In this article, we focus on the ground-based terrestrial sensors and describe them with respect to the proposal. The importance of LIDAR for this proposal is based upon its non-invasive nature of scanning terrestrial surfaces. There are LIDAR systems that can achieve an accuracy of 5mm and cover a range of 800m [11], therefore it is extremely suitable for detecting cracks, ice, water, and foreign objects on the airport runways.

The data produced by LIDAR is a set of data points in 3-D space, commonly known as Point Clouds. Figure 1 shows an example of a torus represented by a point cloud. Point clouds have been used for many purposes such as 3-D CAD model for manufactured parts, and their quality inspection, etc. In our proposal, the point cloud is produced by scanning the airport's runway using the terrestrial LIDAR sensor. The RIEGL VZ-400i [11] (see Figure 2) is one of the possible candidate LIDAR sensor that can be used in our proposed system because it can be used for Forensic and Crash Scene Investigations, architecture surveying and facade measurements, surveying and monitoring, etc. RIEGL VZ-400i can scan a view of $100^\circ \times 360^\circ$ in a range up to 800m with an accuracy of 5mm. The data acquisition speed of 500,000 measurements/sec with real-time geo-referencing simultaneously.

Geo-referencing is one of the important requirements of the proposed system. Through geo-referencing, we intend to locate the anomaly on the runway. Based upon the severity of anomaly preventive or curative actions are to be taken at the location of the anomaly. The integrated GNSS receiver and high accuracy and precision of ranging of RIEGL VZ-400i enable near accurate geo-localization of the anomaly. The RIEGL VZ-400i provides real-time data flow through dual processing platforms; the first processing system performs system operations and

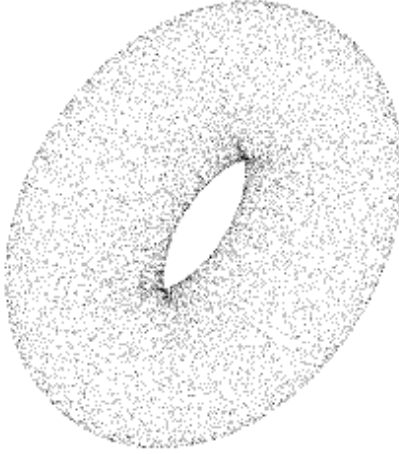


Fig. 1. Example point cloud representation of a Torus [16]

waveform processing, and simultaneous acquisition of scan and image data; the second system provides onboard registration, geo-referencing, and analysis. The RIEGL VZ-400i also comes 3G/4G LTE modem, Wi-Fi, and Ethernet ports, therefore, enables its remote operations.

3.2 MARWIS for Terrestrial Scanning via Vehicle

Mobile Advanced Road Weather Information Sensor (MARWIS) is a non-invasive anomaly detection system for road and runways [12]. MARWIS is a kind of mobile weather station that performs real-time detection of several roads a runway's critical parameters such as temperature, friction, etc. At runways, the problem because of waterlogging and ice formation can lead to disastrous situations. Besides this, the road conditions such as temperature, relative humidity, friction, etc, also add to the problem with runways. MARWIS is an amazing solution to address the aforesated problematic road conditions at runways. MARWIS aids in classifying road conditions like dry, moist, wet, icy, snow, slush, chemically wet. It also calculates the road surface temperature, ambient temperature, water film height (up to 6 mm, dew point temperature, ice percentage, and friction. The data collected from MARWIS will be very helpful in developing the proposed system as we can use these classification produced by MARWIS to label LIDAR data.



Fig. 2. LIDAR RIEGL VZ-400i [11]



Fig. 3. MARWIS sensor assembly [12]

3.3 XTraN for Vehicle monitoring

XTraN is a solution for efficiently managing the fleet and workers. The system provides several functionalities such as fleet scheduling, achieving energy efficiency in vehicle usage, etc. XTraN has an on-board processing unit [22] that is designed to record event alarms in a vehicle. XTraN also provides various interfaces to a vehicle's sensors and enables sensor data collection for vehicle monitoring and fleet management related optimizations. XTraN's on-board processing unit can be easily installed on the majority of the vehicles. XTraN on-board unit has a GNSS module that has an accuracy of 25cm, and integrated UHF radio link (license-free band), and several communication ports (including RS-232, RS-485, 1-wire, USB and CAN). XTraN on-board unit communicates with the main system by interfacing GPRS and one of its communication ports.



Fig. 4. XTraN's on-board processing unit for monitoring vehicle [22]

The XTraN on-board unit also has digital I/Os and analog inputs which can be used to interface with some additional sensors, if required to complement the main source of data. Another advantage of this solution is that accepts a wide voltage range between 10-36V, with a typical consumption of 120mA, which makes it perfectly adapted to be directly plugged to the car battery without any need for further components. We intend to utilize the XTraN on-board unit an interface it with MARWIS to collect data related to the runway, and further utilize this data for labeling the LIDAR data.

4 Proposed System

In this section, we describe the proposed system and its functions. First, we detail the components of the system. Secondly, we discuss the possible field arrangement of the sensors at the runway and scenarios to collect the data.

4.1 Component of Runway Monitoring System

There are four major components of the proposed system; Sensors; Data Storage; Artificial Intelligence (AI) and Machine Learning (ML) Stack; User interface. Figure 5 shows the complete architecture of the proposed system.

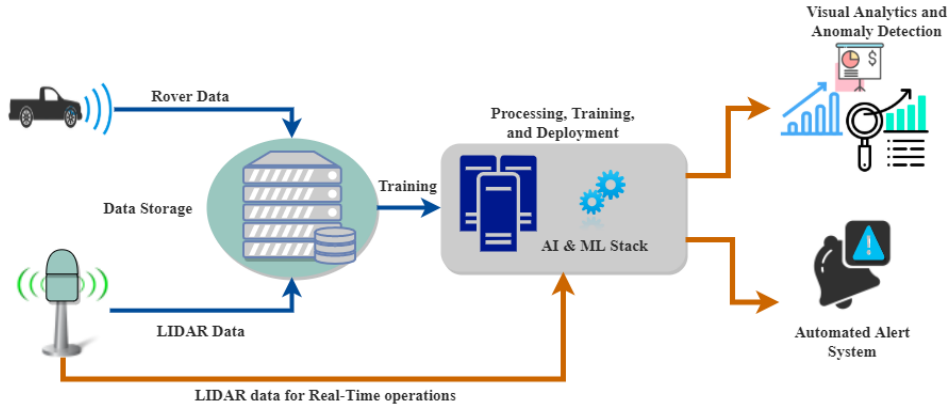


Fig. 5. Architecture of the Runway Monitoring System

- **Sensors:** In the proposed system we suggest using two types of sensors. LIDAR is the prime sensor of the system because it can 3-D scan the entire runway in a non-invasive manner (see Section 3.1 for LIDAR’s description). The data sensed from LIDAR is utilized in two ways; saved in storage developing ML models; and relayed to AI and ML stack for real-time operations (classification, visualization, etc.). MARWIS sensor is the second sensing device we propose to use in this system. MARWIS can be attached to the XTraN’s on-board processing unit of the Rover to scan the runway for anomalies such as water film, ice, etc, (see Sections 3.1 and 3.3 for the description of XTraN and MARWIS). The data from the Rover is also saved into the data storage than can be used to label the LIDAR data.
- **Data Storage:** To save the data obtained from the two sensor devices a Data Storage (Lake) is created. The data from LIDAR sensors are converted in standard LAS format and stored as .las file in the data storage. The data obtained from the Rover can be stored in a database and saving various parameters captured (or calculated) by it. For every capture event, the time and GPS location of the rover is also saved. This GPS location and time will help label the LIDAR data.
- **AI and ML Stack:** There are three main purposes of this stack; data processing; modeling; and model deployment. In data processing, a stack of python scripting language along with libraries like Scikit-Learn, pandas Open3d, etc, can be used to process the data obtained from the rover and

LIDAR, and label the LIDAR data. In modeling, a stack of python along with TensorFlow and Keras can be used to perform the classification operation by using the Convolutional Neural Network (CNNs). In modeling, we also perform tasks like clustering for unsupervised machine learning operations and use visualization libraries like matplotlib, and seaborn for displaying the results. In model deployment, we pickle the learned model and deploy it to provide the classification in real-time. Besides python, the AI and ML stack also consist of opensource tool CloudCompare to perform the data analysis and ML operations. We also intend to crop small images from the from point cloud near to the georeference provided by the Rover data and use it to label the object in the point cloud.

- **User Interface:** The system will have two types of interfaces; an automated alert system; and visual analytics and anomaly detection. The automated alert system a dashboard that provides the output of the runway scan in real-time along with the anomalies identified by the system and their location. This system can be helpful in generating an automated alert based upon the severity of anomaly identified by the system. The second interface is also a dashboard but with a visual aid for example displaying the point cloud with several clusters in the cloud. This interface is also helpful in identifying the unknown anomalies which are not identified during the training process.

As displayed in Figure 5 we first store the data from the two runway scanning sources. The point cloud data from LIDAR is labeled using the geolocations of anomalies determined by the MARWIS sensor of the Rover. After processing and labeling the data, we train a CNN for the labeled point cloud data. Once the training completes and the model is validated it is deployed to the real-time alert system. The visual analytics can also be performed by plotting the identified clusters.

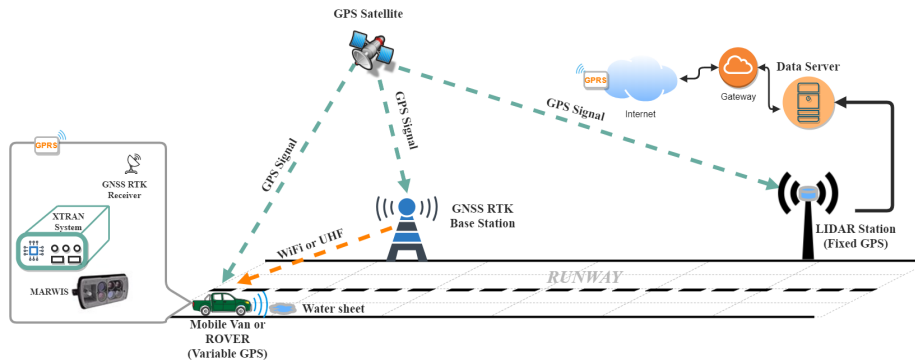


Fig. 6. Field view of the Runway Monitoring System

Figure 6 shows a field view of sensor deployment and data collection strategy on the runway. The Rover is mounted with the MARWIS and GNSS sensors. The LIDAR sensor is mounted over a pole with an integrated GNSS receiver. Both LIDAR and Rover sends the sensed data to the data store via Ethernet and GPRS respectively. In the whole system, the data collection is the most crucial part of the system because we need to send the Rover on the runway with interrupts the aviation service. Following are two data collection schemes that can be efficient:

– **Data Collection Scheme 1**

In this scheme, the LIDAR data is collected first. This collected point cloud data can be used as a reference and can be used to compare (using Cloud-Compare software) with other point clouds collected at different times. The geolocation of the anomalies identified by point cloud comparisons can be used by Rover to scan those locations and further label the anomaly. This scheme has an advantage that anomalies are identified in advance and Rovers can be sent to the runway to the specific locations on the runway. This also can save time needed to interrupt the runway for scanning.

– **Data Collection Scheme 2**

The labeling process takes place at the end of the data collection process. In this scheme, the LIDAR and Rover perform the runway scan simultaneously. This scheme has the advantage of identifying a large number of anomalies because the Rover scans the whole runway before coming back to the base.

4.2 Discussion

Due to the involvement of the laser-based scanning method, the proposed system can monitor the airport's runway in a non-invasive manner. The technologies we mentioned in this proposal are well proven for their domain and we intend to integrate them into a runway monitoring system. There are some issues we anticipate to encounter while developing the proposed system:

– **Point Cloud Data Processing**

In this system, the laser signals will be processed into the point cloud by the in-built software to the LIDAR (i.e., REIGL VZ-400i device). However, the real challenge lies in the processing of the generated point cloud because the point cloud obtained from the terrestrial scan of the runway will be huge.

– **Labeling Foreign Objects**

The list of foreign objects, whether living or non-living, is endless. It is practically impossible to label all foreign objects that are found on the runway because they vary from location to location.

– **Size and Severity of Foreign Objects**

The LIDAR device suggested in this system can scan objects as small as 5mm and we can also determine and label several small objects using the Rover. However, there are a lot of foreign objects (e.g. metal ball bearings, etc.) that are not recognized by MARWIS and they can be equally dangerous for the aircraft and the bigger objects. Labeling of such kind of objects will also be a challenging task.

5 Conclusion

Air travel is considered to be the safest mode of transport. This achievement of the aviation industry is a result of highly efficient airport management. This management also includes the constant monitoring of the airport's assets where the vigilance at runways, taxiways, and aprons are of high priority. Any problems occurring on these assets lead to delays in flights, increase costs, and in the worst-case results in accidents. In this article, we focused on three problems at the airports which are related to structural integrity, foreign objects, and water or ice. We surveyed several methods that solve either of the aforementioned problems individually. Besides the methodologies, we also describe 4 runway monitoring technologies that are state of the art in the detection of foreign objects and structural deformation at the runways and taxiways.

Among the methods and technology reviewed for this work, some take a lot of time to scan the runways, therefore, interrupt the functioning of the airport. Some methods perform real-time monitoring operations but are dependent on human interventions to identify the objects and their exact location. In this article, we provide guidelines to develop a system that can monitor the airport's assets in real-time and in a non-invasive manner. The proposed system consists of LIDAR for non-invasive scanning of the airport's assets. The System also has MARWIS sensors mounted connected to the XTraN on-board processor of a mobile rover. We describe all components of the proposed system and its underlying technologies. We also explain two data collection schemes to label the LIDAR data based upon the location and category of anomaly sensed by the rover. The use of mature technologies of the proposed system has the potential to efficiently monitor the airport's assets in real-time and in a non-invasive manner. We also discuss some issues that are to be addressed before developing the system.

Acknowledgement

The work presented in this paper was carried out in the scope of the project Persistent Runway Monitoring (MPP-Monitorização Persistente de Pista) SI IDT code of project is 039876, co-financed by CENTRO 2020, Portugal 2020—Operational Program for Competitiveness and Internationalization (POCI), European Union's ERDF (European Regional Development Fund), and the Portuguese Foundation for Science and Technology (FCT).

References

1. Cao, X., Wang, P., Meng, C., Bai, X., Gong, G., Liu, M., Qi, J.: Region based cnn for foreign object debris detection on airfield pavement. *Sensors* **18**(3), 737 (2018)
2. Chen, W., Xu, Q., Ning, H., Wang, T., Li, J.: Foreign object debris surveillance network for runway security. *Aircraft Engineering and Aerospace Technology* (2011)
3. Air France 4590. online, https://en.wikipedia.org/wiki/Air_France_Flight_4590, accessed on August 2020

4. Ezraty, R.: New-ice detection using microwave sensors. In: IGARSS 2003. 2003 IEEE International Geoscience and Remote Sensing Symposium. Proceedings (IEEE Cat. No. 03CH37477). vol. 1, pp. 270–272. IEEE (2003)
5. Feil, P., Menzel, W., Nguyen, T., Pichot, C., Migliaccio, C.: Foreign objects debris detection (fod) on airport runways using a broadband 78 ghz sensor. In: 2008 38th European Microwave Conference. pp. 1608–1611. IEEE (2008)
6. Foreign Object Debris and Damage Prevention. online, <https://www.boeing.com/commercial/aeromagazine/aero.01/textonly/s01txt.html>, accessed on August 2020
7. Gui, Z., Li, H.: Automated defect detection and visualization for the robotic airport runway inspection. *IEEE Access* **8**, 76100–76107 (2020)
8. RIS Hi-Pave for Road and Runway monitoring. online, <https://www.stanlay.in/ground-penetrating-radars-equipment/hi-pave-gpr-for-pavement-engineering/ris-hi-pave/>, accessed on August 2020
9. Hussin, R., Ismail, N., Mustapa, S.: A study of foreign object damage (fod) and prevention method at the airport and aircraft maintenance area. In: IOP Conference Series: Materials Science and Engineering. vol. 152, p. 012038. IOP Publishing (2016)
10. IFERRET FOREIGN OBJECT & DEBRIS DETECTION. online, <https://www.westernadvance.com/Aviation>, accessed on August 2020
11. LIDAR Terrestrial Sensor RIEGL VZ-400i. online, <http://www.riegl.com/nc/products/terrestrial-scanning/produktdetail/product/scanner/48/>, accessed on July 2020
12. MARWIS - Mobile Advanced Road Weather Information Sensor. online, <https://www.luftt.com/products/road-runway-sensors-292/marwis-umb-mobile-advanced-road-weather-information-sensor-2308/>, accessed on July 2020
13. Nsengiyumva, F., Pichot, C., Aliferis, I., Lanteri, J., Migliaccio, C.: Millimeter-wave imaging of foreign object debris (fod) based on two-dimensional approach. In: 2015 IEEE Conference on Antenna Measurements & Applications (CAMA). pp. 1–4. IEEE (2015)
14. Pasindu, H., Fwa, T.: Incorporating risk of failure into maintenance management of cracks in runway pavements. *Transportation research record* **2177**(1), 114–123 (2010)
15. Peng, L., Chao, W., Shuangmiao, L., Baocai, F.: Research on crack detection method of airport runway based on twice-threshold segmentation. In: 2015 Fifth International Conference on Instrumentation and Measurement, Computer, Communication and Control (IMCCC). pp. 1716–1720. IEEE (2015)
16. Point cloud — Wikipedia, the free encyclopedia. online, https://en.wikipedia.org/wiki/Point_cloud, accessed on July 2020
17. Qunyu, X., Huansheng, N., Weishi, C.: Video-based foreign object debris detection. In: 2009 IEEE International Workshop on Imaging Systems and Techniques. pp. 119–122. IEEE (2009)
18. Roadscanners. online, <https://www.roadscanners.com/services/airport-surveys/>, accessed on August 2020
19. Sinha, S.K., Fieguth, P.W.: Automated detection of cracks in buried concrete pipe images. *Automation in Construction* **15**(1), 58–72 (2006)
20. Tarsier Automatic Runway FOD Detection System. online, <https://www.westernadvance.com/Aviation>, accessed on August 2020
21. Troiano, A., Pasero, E., Mesin, L.: An innovative water and ice detection system for monitoring road and runway surfaces. In: 6th Conference on Ph. D. Research in Microelectronics & Electronics. pp. 1–4. IEEE (2010)

22. XTraN-Fleet Management. online, <https://www.tecmic.com/portfolio/xtran/>, accessed on July 2020
23. Yigit, E., Demirci, S., Unal, A., Ozdemir, C., Vertiy, A.: Millimeter-wave ground-based synthetic aperture radar imaging for foreign object debris detection: experimental studies at short ranges. *Journal of Infrared, Millimeter, and Terahertz Waves* **33**(12), 1227–1238 (2012)
24. Zhongda, Y., Mingguang, L., Xiuquan, C.: Research and implementation of fod detector for airport runway. In: *IOP Conference Series: Earth and Environmental Science*. vol. 304, p. 032050. IOP Publishing (2019)